


MOLYSLIP MLG (Moly E.P. Lithium Grease)

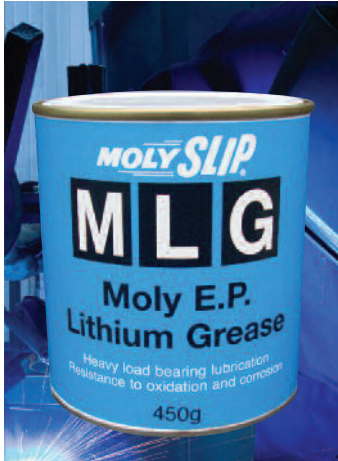

GENERAL DESCRIPTION:

MOLYSLIP MLG is a Multi-purpose Moly EP lithium grease. Formulated for extreme pressure load bearing capacity and resistance to oxidation and corrosion. It helps to prolong periods between maintenance and routine greasing.

PERFORMANCE AND APPLICATIONS:

HIGH PERFORMANCE GREASE – Lithium based with Molybdenum Disulphide, extreme pressure and anti-corrosion additives.

EXTREME PRESSURE LOAD CAPACITY – Formulated to provide exceptionally high load bearing capacity enabling prolonged maintenance and routine greasing intervals.

HIGH OXIDATION STABILITY – Provides rust prevention and minimises fretting corrosion. Good resistance against fresh or salt water contamination.

APPLICATIONS INCLUDE:

- For all ball and roller bearings where grease lubrication is specified, particularly medium to high speeds.
- General chassis and machinery lubrication.
- Hub and electric motor grease lubricated bearings.
- Plain bearings, slides, screws and valve threads for dockside, dock equipment, general transport and industrial applications.
- All types of applications to sustain heavy duty or prolong life of components and to reduce friction and wear.

TECHNICAL DATA:

Base	Lithium
Consistency	N.L.G.I. No.2
Worked penetration at 25°C	265 - 295
Melting Point	195°C
Total MoS ₂ and Moly Slip Special E.P. compounds	9%
Steady Working Temperature	-30°C to 150°C

PACKAGING:

- 450g tins (carton of 24)
- 400g cartridges (carton of 24)
- 3kg tins (carton of 2 or 4)
- 12.5kg, 25kg, 50kg and 180kg (individual)

01 October 2012