


MOLYSLIP GPG

A general purpose extreme pressure lithium grease with solid lubricant

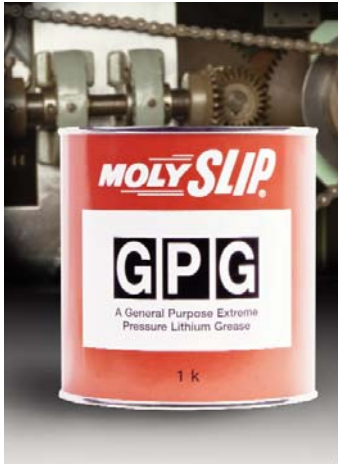

GENERAL DESCRIPTION:

MOLYSLIP GPG - A top quality lithium base high melting point grease of No.2 consistency. The grease is made by the molyslip double process from specially selected materials to ensure maximum shear stability. The grease is completely resistant to water (both fresh and salt) and it gives excellent protection against rusting and corrosion. With a wide working temperature range it is most suitable where high temperatures and/or heavy load conditions exist.

PERFORMANCE AND USAGE:

The oil soluble extreme pressure (EP) additive has been specially selected to ensure compatibility with the lithium grease base and increases the immediate load carrying capacity of the grease. molyslip GPG is the true multi-purpose lubricant suitable for ball, roller and plain bearings in most conditions of service in vehicles, machinery, electric motors and generators etc.

EXTRA INFORMATION:

Can be applied by automatic pressure greasing equipment as well as by hand operated guns, and, where fitted, automatic lubricators.

TECHNICAL DATA:

Base	Lithium hydroxystearate
Consistency	No.2 Medium
Penetration (I.P.50)	265/295
Drop Point	190°C
Working temperature range	-30°C to 150°C

PACKAGING:

400g cartridge (boxed in 24's)
1 kg tins (boxed in 12's)
5 kg tins(boxed 4's)
12.5 kg kegs
180 kg drums

01 May 2009